

Les ampoules de remplacement doivent être de même type et la puissance en watts que spécifié dans des instructions.

Avant de monter/déconnecter le courant.

Des surfaces métalliques, le verre ou d'autres parties peuvent être nettoyés avec un tissu humide doux et un détergent doux



The safety of this fixture is only guaranteed if the following instructions have been observed.

Always disconnect power before working on fixture.

Replacement bulbs must be of same type and wattage as specified in instructions.

Metal surfaces, glass or other parts of fixture may be cleaned with a soft damp cloth and mild detergent.



TUS.KD.004.02	TUS.KD.016.02	1 x 13W / LED / Medium base / 120V
TUS.KD.004.14	LED 10W 120V 850lm 2700K	TRIAC dimming

Light for indoor use only
Seulement pour éclairage intérieur
Tension d'entrée: 120V - 60Hz
Input voltage: 120V - 60Hz



EL TORRENT IL·LUMINACIÓ S.L.

C/ Curreró 8, 17830
Mieres (Girona) Spain

T. +34 972 680 291
F. +34 972 680 011
eltorrent@eltorrent.com

www.eltorrent.com



use only these product must be installed by a qualified electrician.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor involved.

by a person familiar with the construction and operation of the product and the hazard applicable installation code.

Allowed for damp locations. This product must be installed in accordance with the authorization and instructions from the manufacturer.

Isn't allowed to change or replace any of the components involved on this piece without the before servicing.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power Save these instructions. Min 90c supply conductors.

ELECTRICAL INSTRUCTIONS FOR LAMPS WITH LED TECHNOLOGY.

use only these product must be installed by a qualified electrician.

Warning: all wires and wire nuts used in the installation must be rated 195F(90C) for indoor involved.

by a person familiar with the construction and operation of the product and the hazard This product must be installed in accordance with the applicable installation code.

damp locations.

To reduce the risk of a burn during replacing, allow to the bulb to cool down. Allowed for before servicing.

Caution risk of fire. Use stated watt or smaller. Caution risk of shock. Disconnect power Save these instructions. Min 90c supply conductors.

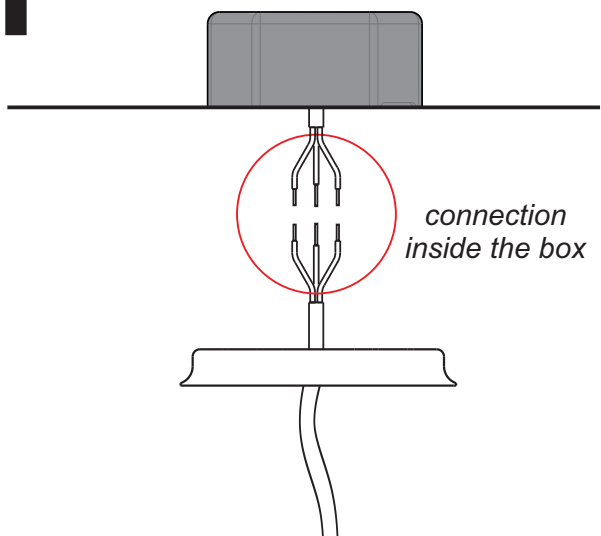
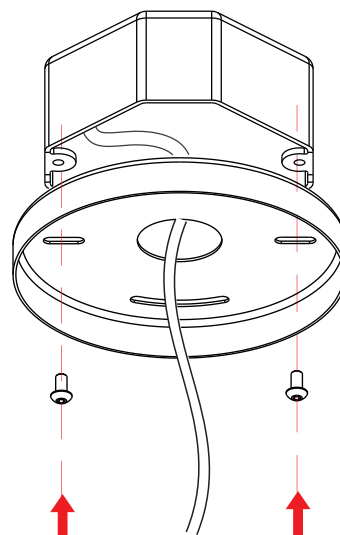
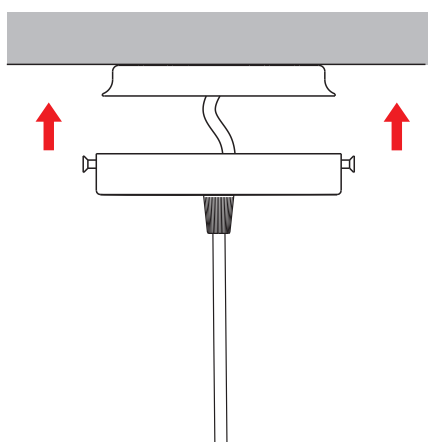
ELECTRICAL INSTRUCTIONS FOR FLUSHMOUNTS, WALL SCONCES, AND PENDANTS.

U11598.

KOORD
Indoor



Assembly instructions
Instructions de montage

1**2****3****4**